
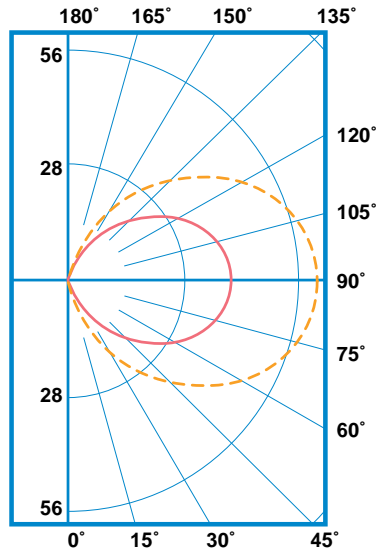


Visions Step Light

Open Face Plate

ITL Test # 54170

Lamps	Four 2.1 watt T-1 cold cathode linear fluorescent.
Total Input Watts	9.3 at 120.0 volts
Lamps Rated	98 Lumens each
Total Luminaire Efficiency	38.8%
CIE Type	Direct-Indirect



Candela Distribution						Flux
	0	45.0	90.0	135.0	180.0	
0	0	0	0	0	0	0
5	1	1	0	0	0	0
15	6	3	0	0	0	0
25	16	9	0	0	0	2
35	26	15	0	0	0	4
45	36	22	0	0	0	8
55	45	28	0	0	0	11
65	53	33	0	0	0	15
75	58	37	0	0	0	18
85	61	39	0	0	0	19
90	61	39	0	0	0	
95	61	38	0	0	0	19
105	58	36	0	0	0	17
115	52	32	0	0	0	14
125	44	27	0	0	0	11
135	34	21	0	0	0	7
145	24	14	0	0	0	4
155	15	8	0	0	0	2
165	5	3	0	0	0	0
175	1	1	0	0	0	0
180	0	0	0	0	0	0

Zonal Lumen Summary



Zone	Lumens	%Lamp	%Fixt
0-30	2	0.6	1.5
0-40	7	1.7	4.3
0-60	25	6.5	16.7
0-90	77	19.6	50.4
90-120	51	13.0	33.4
90-130	62	15.8	40.6
90-150	73	18.7	48.1
90-180	75	19.2	49.6
0-180	152	38.8	100.0

Visions Step Light

Regressed Face Plate

ITL Test # 54171

Lamps	Two 2.1 watt T-1 cold cathode linear fluorescent.
Total Input Watts	4.7 at 120.0 volts
Lamps Rated	98 Lumens each
Total Luminaire Efficiency	35.1%
CIE Type	Semi-Direct

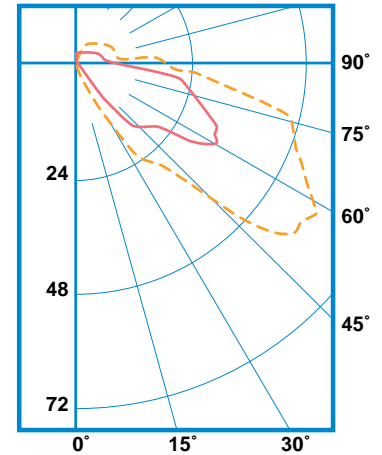

Candela Distribution						Flux
	0	45.0	90.0	135.0	180.0	
0	0	0	0	0	0	0
5	1	0	0	0	0	0
15	1	0	0	0	0	0
25	3	1	0	0	0	0
35	25	5	0	0	0	3
45	43	19	0	0	0	7
55	57	28	0	0	0	13
65	53	33	0	0	0	14
75	46	25	0	0	0	12
85	24	13	0	0	0	7
90	18	10	0	0	0	
95	14	6	0	0	0	4
105	9	6	0	0	0	3
115	8	5	0	0	0	2
125	7	4	0	0	0	2
135	6	3	0	0	0	1
145	5	3	0	0	0	1
155	4	2	0	0	0	0
165	3	1	0	0	0	0
175	1	0	0	0	0	0
180	0	0	0	0	0	0

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt
0-30	0	0.2	0.6
0-40	3	1.7	4.8
0-60	23	11.7	33.3
0-90	56	28.7	82.0
90-120	8	4.2	12.1
90-130	10	5.0	14.4
90-150	12	6.0	17.2
90-180	12	6.3	18.0
0-180	69	35.1	100.0



T-1® LIGHTING

A Division of BJI Energy Solutions, LLC

www.T-1Lighting.com

888-733-6374

212-253-4248 fax